

Flexible Wavelength Selector – High Resolution

The Flexible Wavelength Selector utilizes TwinFilm™ technology to deliver the wavelength tuning and adjustable bandwidth of a grating monochromator together with the imaging advantages of a circular aperture filter. The high resolution manual format features two precision multi-rotation dials for adjusting the center wavelength and the transmission bandwidth. The third knob is used for compensating the beam direction offset. Click [here](#) for videos and more information.


/ Optical Specifications

- Transmission: > 75%
- Wavelength Tuning Range: ~100 nm
- FWHM: 2 nm ~ 16 nm
- Extinction Coefficient: $OD_{avg} > 6$ (275 nm – 925 nm)
- Cut-on Transition Width: 2% – 3% (from blocking to transmission)
- Cut-off Transition Width: 2% – 3% (from transmission to blocking)



/ General Specifications

- Dimensions : 40 mm x 76 mm x 50 mm
- Aperture Size : up to 10 mm
- Precise adjustment of wavelength and bandwidth

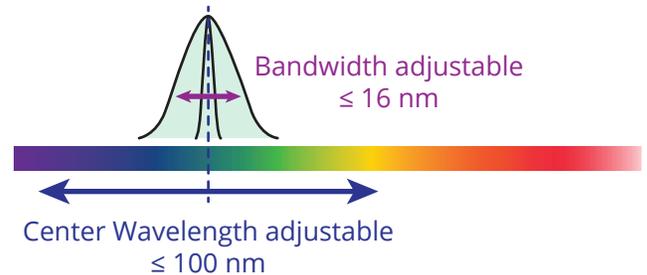

Flexible Wavelength Selectors - High Resolution

Spectral Range ¹	Item Number
358 - 400 nm	FWS-H-M-380
395 - 447 nm	FWS-H-M-425
447 - 501 nm	FWS-H-M-475
496 - 561 nm	FWS-H-M-530
555 - 628 nm	FWS-H-M-595
621 - 703 nm	FWS-H-M-665
687 - 790 nm	FWS-H-M-745
784 - 900 nm	FWS-H-M-845

Based on maximum bandwidth.¹
Change in bandwidth may impact the spectral range.