

- Supercontinuum lasers
- SCIENTIFIC
- GENERIC




# SAMBA

## COST EFFECTIVE SUPERCONTINUUM LASER



**SAMBA** is a supercontinuum laser for every day use in labs. They are an effective replacement for lamp, SLED, LED.


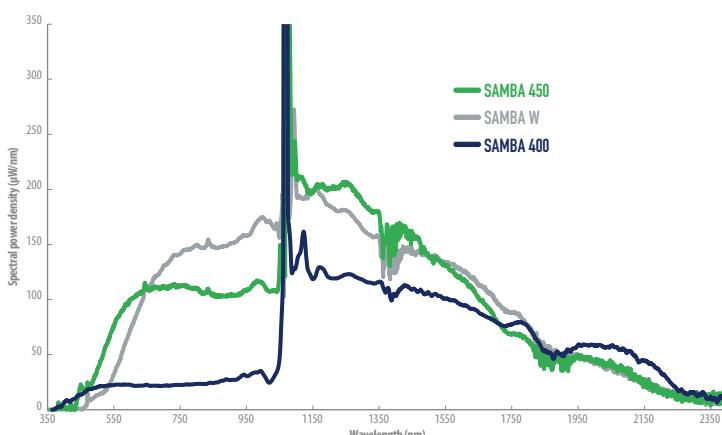


### FEATURES

- From UV to NIR 350-2400nm
- Spatially singlemode
- Free-running or externally triggerable
- High energy per pulse up to 7μJ
- Total average power up to 250mW
- Maintenance-free
- Reliable all-fibered laser source

### APPLICATIONS

- High resolution imaging
- Flow cytometry
- OCT
- Microscopy
- Optical component characterization



# SAMBA

## COST EFFECTIVE SUPERCONTINUUM LASER

**SAMBA** offers multiple wavelengths with a flat, stable, broadband spectrum with a fibered output. Turn-key benchtop, maintenance-free, robust and user-friendly, these sources are convenient for general purpose applications.


- Supercontinuum lasers
- SCIENTIFIC
- GENERIC



### OPTION

- Achromatic collimated laser output**
- Timing jitter optimization < 500 ns (pulse to pulse)**
- Laser optimization at another nominal repetition rate**

OPTICAL SPECIFICATIONS		SAMBA 400	SAMBA 450	SAMBA W	SAMBA UV		
<b>Spectral bandwidth</b>	min	< 400 nm	< 450 nm	< 500 nm	< 340 nm		
	max	> 2 400 nm	> 2 400 nm	> 1 900 nm	> 2 400 nm		
<b>Total average power</b>		> 100 mW	> 150 mW	> 200 mW	> 100 mW		
<b>Total visible power</b>		> 10 mW	> 35 mW	> 50 mW	> 10 mW		
<b>Seed repetition rate</b>		25 kHz (typical ~ 30 kHz)					
<b>Triggerable range</b>		10 Hz up to > 15 kHz (typical ~ 20 kHz)					
<b>Timing jitter</b>		< 2µs					
<b>Power stability</b>		+/- 1 %					
<b>Seed pulse width</b>		~1 ns		>1 ns			
<b>Spatial mode</b>		Singlemode					
<b>Polarization state</b>		Unpolarized					
<b>Laser output</b>		FC/APC (> 1 meter armored cable)					
<b>Synchronization output</b>		External Trigger Output					
OTHER SPECIFICATIONS							
<b>Control interface</b>		Front panel and USB					
<b>Operating temperature</b>		+5°C to +45°C non condensing					
<b>Weight</b>		< 3 kg					
<b>Dimensions (LxWxh)</b>		200x152x95 mm					
<b>Power requirements</b>		100-240 V, 50/60 Hz					

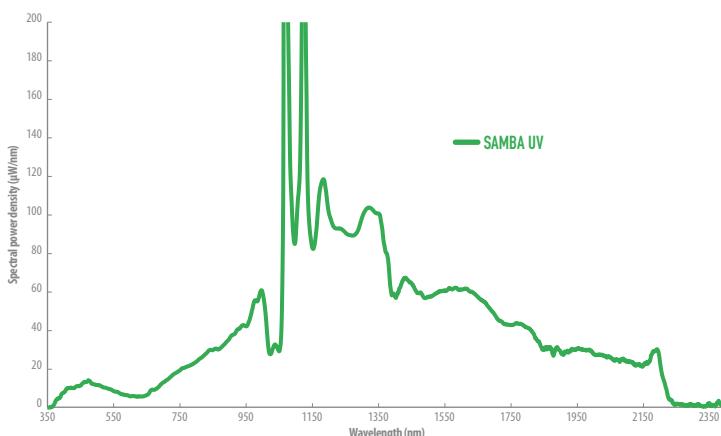

CAUTION – VISIBLE AND INVISIBLE  
LASER RADIATION AVOID EYE AND  
SKIN EXPOSURE TO DIRECT OR  
SCATTERED RADIATION  
CLASS 3B LASER PRODUCT

**LEUKOS**  
Make a bright future

+33 (0)5 87 20 00 25  
contactus@leukos-systems.com  
[www.leukos-systems.com](http://www.leukos-systems.com)