

ZephIR™ 2.5e

INFRARED CAMERA



Introducing the groundbreaking ZephIR 2.5e, the first camera to feature a T2SL sensor up to 2500 nm. With its state-of-the-art thermo-electric cooling, the ZephIR 2.5e delivers unparalleled operability and ultra-low noise performance. Engineered for speed and equipped with versatile connectivity options, it's the ideal solution for both industrial precision and scientific exploration. Step into the future of infrared imaging and redefine what is possible with the ZephIR 2.5e.


TECHNICAL SPECIFICATIONS

Sensor	T2SL FPA		
Sensor Format	640 x 512		
Pixel size	15 µm		
Spectral range	1100 - 2500 nm		
Peak Quantum Efficiency	> 30%		
Typical operability	> 99%		
Cooling Temperature @ 20°C ambient	-80 °C		
Cooling method	TEC + forced air		
Typical Dark Current	30 Mø/px/s		
	High	Med	Low
Typical Gain setting (ø/ADU)	2.3	7.4	90
Typical readout noise (ø)	45	75	300
Typical full well capacity (kø)	28	110	1400
Readout modes	CDS ITR, CDS IWR, IMRO IWR		
Frame Rate	240		
ROI Frame Rate	Up to 4000		
Integration time range	from 1 µs to full well capacity		
Digitization	14 bits		
Image Format	16 bits HDF5, FITS and TIFF		
Software	PhySpec™ control and analysis software, SDK (C++, Python)		
Computer interface	USB 3.0 and CameraLink™		
External control	Trigger IN/OUT		
Ambient temperature range	10 °C to 35 °C		
Power Supply	12V DC		
Dimensions	169 mm x 130 mm x 97.25 mm		
Weight	2.9 kg		
Certification	CE 		

MAIN ADVANTAGES OF TEC + AIR SYSTEM

- » Compact
- » No maintenance
- » Highly reliable
- » Low dark current
- » Long lifetime
- » Low readout noise



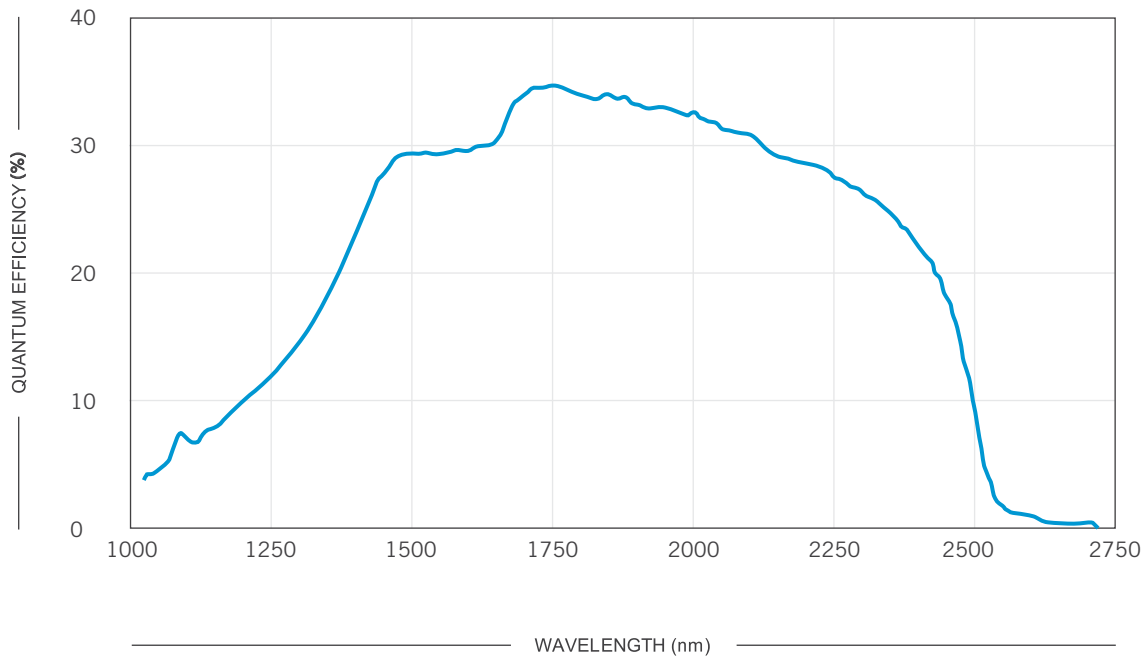

ZephIR 2.5e


Quantum efficiency presented at -80 °C

APPLICATIONS




SWIR Imaging in Degraded Environment

The images highlight the advantages of SWIR imaging using our ZephIR 2.5e camera. In the visible spectrum (left), dense smoke obscures the view, making it difficult to see through. However, the SWIR image (right) reveals details hidden in the smoke in the visible spectrum. This capability is crucial for applications such as surveillance, search and rescue, and industrial monitoring, where visibility is often hindered by environmental factors like smoke or fog. The ZephIR 2.5e provides enhanced visibility in challenging conditions, offering critical insights in degraded environments.

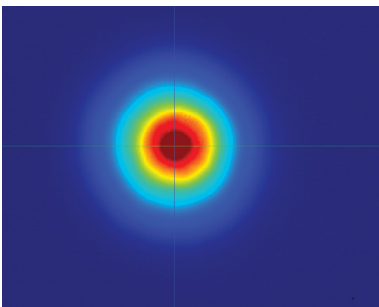

2-D Intensity Profiling with ZephIR 2.5e

The ZephIR 2.5e SWIR T2SL camera delivers precise 2-D intensity profiling of collimated supercontinuum sources. Detailed spatial energy distributions are captured, with horizontal and vertical axis profiles providing critical insights into beam uniformity and alignment. Accurate beam profiling, whether for lasers or supercontinuum sources, is essential for maintaining optimal system performance.

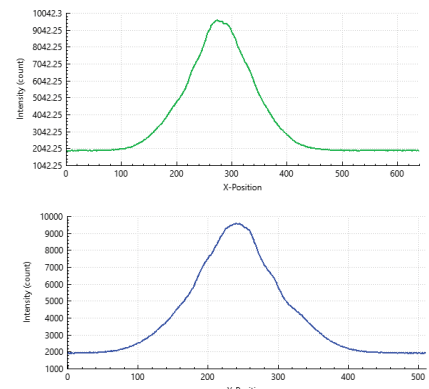



グローバルにネットワークを広げ、最先端の科学をお客様に提供

本 社：〒134-0088 東京都江戸川区西葛西6-18-14 T. ビル

Tel. 03-3686-4711

営業所：〒532-0003 大阪府大阪市淀川区宮原4-1-46 新大阪北ビル

Tel. 06-6393-7411

URL: <https://www.tokyoinst.co.jp> Mail: sales@tokyoinst.co.jp



超高真空・極低温走査型プローブ顕微鏡
高速分光測定装置、クライオスタット



Nd:YAGレーザー、Ti:Sレーザー
OPOLレーザー

- 本カタログに記載されている内容は、改良のため予告無く変更する場合があります。（製品の仕様、性能、価格などはカタログ発行当時のものです）
- 本カタログに記載されている内容の一部または全部を無断で転載することは禁止されております。
- 本カタログに記載されているメーカー名、製品名などは各社の商標または登録商標です。