




Lambda Beam laser system incl. pigtailed fiber
fiber length 1m
Internal 8° Angle-Cleaved Fiber

KEY FEATURES:

- * Output powers up to 300mW
- * Broad selection of wavelengths; fine-tuneable
- * Temperature-stabilized

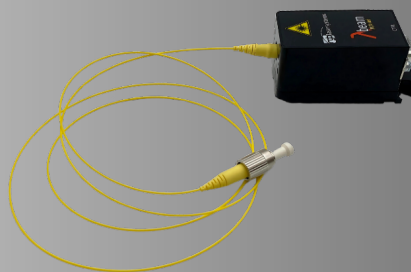

Art. No.	Art. No.	MODEL	Description
PowerController	PowerBox (PB)	SINGLE MODE FIBER	

DLA499600	DLA499500	Lambda beam pigtailed 405-10 SM	405 nm, 10 mW fiber out, single-mode fiber, FC/PC
DLA499601	DLA499501	Lambda beam pigtailed 450-25 SM	450 nm, 25 mW fiber out, single-mode fiber, FC/PC
DLA499620	DLA499520	Lambda beam pigtailed 488-20 SM	488 nm, 20 mW fiber out, single-mode fiber, FC/PC
DLA499602	DLA499502	Lambda beam pigtailed 515-3 SM	515 nm, 3 mW fiber out, single-mode fiber, FC/PC
DLA499631	DLA499531	Lambda beam pigtailed 520-15 SM	520 nm, 15 mW fiber out, single-mode fiber, FC/PC
DLA499540	DLA499540	Lambda beam pigtailed 633-50 SM	633 nm, 50 mW fiber out, single-mode fiber, FC/PC
DLA499644	DLA499544	Lambda beam pigtailed 635-2.5 SM	635 nm, 2.5 mW fiber out, single-mode fiber, FC/PC
DLA499604	DLA499504	Lambda beam pigtailed 635-8 SM	635 nm, 8 mW fiber out, single-mode fiber, FC/PC
DLA499850	DLA499750	Lambda beam pigtailed 637-50 SM	637 nm, 50 mW fiber out, single-mode fiber, FC/PC
DLA499605	DLA499505	Lambda beam pigtailed 637-70 SM	637 nm, 70 mW fiber out, single-mode fiber, FC/PC
DLA499661	DLA499561	Lambda beam pigtailed 642-20 SM	642 nm, 20 mW fiber out, single-mode fiber, FC/PC
DLA499606	DLA499506	Lambda beam pigtailed 658-7.5 SM	658 nm, 7.5 mW fiber out, single-mode fiber, FC/PC
DLA499607	DLA499507	Lambda beam pigtailed 658-20 SM	658 nm, 20 mW fiber out, single-mode fiber, FC/PC
DLA499608	DLA499508	Lambda beam pigtailed 658-40 SM	658 nm, 40 mW fiber out, single-mode fiber, FC/PC
DLA499609	DLA499509	Lambda beam pigtailed 658-60 SM	658 nm, 60 mW fiber out, single-mode fiber, FC/PC
DLA499610	DLA499510	Lambda beam pigtailed 660-50 SM	660 nm, 50 mW fiber out, single-mode fiber, FC/PC
DLA499611	DLA499511	Lambda beam pigtailed 670-2.5 SM	670 nm, 2.5 mW fiber out, single-mode fiber, FC/PC
DLA499612	DLA499512	Lambda beam pigtailed 685-15 SM	685 nm, 15 mW fiber out, single-mode fiber, FC/PC
DLA499613	DLA499513	Lambda beam pigtailed 705-15 SM	705 nm, 15 mW fiber out, single-mode fiber, FC/PC
DLA499614	DLA499514	Lambda beam pigtailed 730-15 SM	730 nm, 15 mW fiber out, single-mode fiber, FC/PC
DLA499873	DLA499773	Lambda beam pigtailed 785-10 SM	785 nm, 10 mW fiber out, single-mode fiber, FC/PC
DLA499615	DLA499515	Lambda beam pigtailed 785-20 SM	785 nm, 20 mW fiber out, single-mode fiber, FC/PC
DLA499874	DLA499774	Lambda beam pigtailed 785-100 SM	785 nm, 100 mW fiber out, single-mode fiber, FC/PC
DLA499879	DLA499779	Lambda beam pigtailed 808-60 SM	808 nm, 60 mW fiber out, single-mode fiber, FC/PC
DLA499616	DLA499516	Lambda beam pigtailed 820-80 SM	820 nm, 80 mW fiber out, single-mode fiber, FC/PC
DLA499617	DLA499517	Lambda beam pigtailed 830-10 SM	830 nm, 10 mW fiber out, single-mode fiber, FC/PC
DLA499888	DLA499788	Lambda beam pigtailed 852-30 SM	852 nm, 30 mW fiber out, single-mode fiber, FC/PC
DLA499618	DLA499518	Lambda beam pigtailed 852-60 SM	852 nm, 60 mW fiber out, single-mode fiber, FC/PC
DLA499619	DLA499519	Lambda beam pigtailed 880-3 SM	880 nm, 3 mW fiber out, single-mode fiber, FC/PC
DLA499628	DLA499528	Lambda beam pigtailed 904-3 SM	904 nm, 3 mW fiber out, single-mode fiber, FC/PC
DLA499890	DLA499790	Lambda beam pigtailed 915-40 SM	915 nm, 40 mW fiber out, single-mode fiber, FC/PC
DLA499621	DLA499521	Lambda beam pigtailed 940-30 SM	940 nm, 30 mW fiber out, single-mode fiber, FC/PC
DLA499622	DLA499522	Lambda beam pigtailed 980-15 SM	980 nm, 15 mW fiber out, single-mode fiber, FC/PC
DLA499623	DLA499523	Lambda beam pigtailed 980-60 SM	980 nm, 60 mW fiber out, single-mode fiber, FC/PC
DLA499624	DLA499524	Lambda beam pigtailed 1064-50 SM	1064 nm, 50 mW fiber out, single-mode fiber, FC/PC
DLA499625	DLA499525	Lambda beam pigtailed 1310-50 SM	1310 nm, 50 mW fiber out, single-mode fiber, FC/PC
DLA499626	DLA499526	Lambda beam pigtailed 1550-1.5 SM	1550 nm, 1.5 mW fiber out, single-mode fiber, FC/PC
DLA499627	DLA499527	Lambda beam pigtailed 1550-50 SM	1550 nm, 50 mW fiber out, single-mode fiber, FC/PC

Art. No.	Art. No.	MODEL	Description
PowerController	PowerBox (PB)	SINGLE MODE FIBER & COLLIMATOR	

DLA499630	DLA499530	Lambda beam pigtailed 405-30 COL SM	405 nm, 30 mW fiber out, single-mode fiber, incl. Ø8 mm, Sealed, Argon-Gas-Filled Collimator
-----------	-----------	--	---

Art. No.	Art. No.	MODEL	Description
PowerController	PowerBox (PB)	POLARIZATION-MAINTAINING FIBER	

DLA499644	DLA499544	Lambda beam pigtailed 635-2.5 PM	635 nm, 2.5 mW fiber out, polarization-maintaining fiber, FC/PC
DLA499661	DLA499561	Lambda beam pigtailed 642-20 PM	642 nm, 20 mW fiber out, polarization-maintaining fiber, FC/PC
DLA499666	DLA499566	Lambda beam pigtailed 785-6.5 PM	785 nm, 6.5 mW fiber out, polarization-maintaining fiber, FC/PC
DLA499670	DLA499570	Lambda beam pigtailed 830-10 PM	830 nm, 10 mW fiber out, polarization-maintaining fiber, FC/PC
DLA499671	DLA499571	Lambda beam pigtailed 1310-2.5 PM	1310 nm, 2.5 mW fiber out, polarization-maintaining fiber, FC/PC
DLA499675	DLA499575	Lambda beam pigtailed 1550-1.5 PM	1550 nm, 1.5 mW fiber out, polarization-maintaining fiber, FC/PC

Customs Pigtails available upon request

Art. No.	Art. No.	MODEL	Description
PowerController	PowerBox (PB)	MULIT-MODE FIBER	
DLA499677	DLA499577	 Lambda beam pigtailed 405-300 MM	405 nm, 300 mW fiber out, multi-mode fiber, FC/PC
DLA499680	DLA499580	 Lambda beam pigtailed 635-7.5 MM	635 nm, 7.5 mW fiber out, multi-mode fiber, SMA905
DLA499682	DLA499582	 Lambda beam pigtailed 658-22.5 MM	658 nm, 22.5 mW fiber out, multi-mode fiber, SMA905

Art. No.	Art. No.	MODEL	Description
PowerController	PowerBox (PB)	VHG STABILIZED SINGLEFREQUENCY	
DLA499875	DLA499775	 Lambda beam pigtailed 785-50 VHG SM	785 nm, 50 mW fiber out, single-mode fiber, FC/APC Wavelength-Stabilized Output (VHG) Narrow 10 MHz typical Linewidth (CW, FWHM) Integrated Optical Isolator (Against Back Reflexions)

Customs Pigtails available upon request



グローバルにネットワークを広げ、最先端の科学をお客様に提供

本 社：〒134-0088 東京都江戸川区西葛西6-18-14 T. ビル

Tel. 03-3686-4711

営業所：〒532-0003 大阪府大阪市淀川区宮原4-1-46 新大阪北ビル

Tel. 06-6393-7411

URL：https://www.tokyoinst.co.jp Mail：sales@tokyoinst.co.jp



超高真空・極低温走査型プローブ顕微鏡
高速分光測定装置、クライオスタット



Nd:YAGレーザー、Ti:Sレーザー
OPOレーザー

- 本カタログに記載されている内容は、改良のため予告無く変更する場合があります。（製品の仕様、性能、価格などはカタログ発行当時のものです）
- 本カタログに記載されている内容の一部または全部を無断で転載することは禁止されております。
- 本カタログに記載されているメーカー名、製品名などは各社の商標または登録商標です。